

C6




HG-2510 BODY ONLY
Meets Federal Specifications
FF-T-791b, Type 1 Form 1 —
CLASS 2

Bodies Are Hot Dipped
Galvanized

Diameter and Takeup (In)	Body Only Weight (lbs)	Diameter and Takeup (In)	Body Only Weight (lbs)
$\frac{1}{4} \times 4$.15	1 x 6	2.48
$\frac{5}{16} \times 4\frac{1}{2}$.19	1 x 12	3.93
$\frac{3}{8} \times 6$.29	1 x 18	5.28
$\frac{1}{2} \times 6$.60	1 x 24	7.38
$\frac{1}{2} \times 9$.68	$1\frac{1}{4} \times 12$	5.25
$\frac{1}{2} \times 12$	1.00	$1\frac{1}{4} \times 18$	7.75
$\frac{5}{8} \times 6$.90	$1\frac{1}{4} \times 24$	10.17
$\frac{5}{8} \times 9$	1.18	$1\frac{1}{2} \times 12$	8.75
$\frac{5}{8} \times 12$	1.43	$1\frac{1}{2} \times 18$	11.00
$\frac{3}{4} \times 6$	1.30	$1\frac{1}{2} \times 24$	13.69
$\frac{3}{4} \times 9$	1.75	$1\frac{3}{4} \times 18$	16.38
$\frac{3}{4} \times 12$	2.08	$1\frac{3}{4} \times 24$	21.25
$\frac{3}{4} \times 18$	2.50	2 x 24	27.60
$\frac{7}{8} \times 12$	2.70	$2\frac{1}{2} \times 24$	54.00
$\frac{7}{8} \times 18$	3.80	$2\frac{3}{4} \times 24$	54.00

*Normalized




Note stress relieving radii in this unretouched photo enlargement of the super-buckle with mod thread.



Standard thread. Note stress building sharp "V" in this unretouched photo enlargement.

**When Ordering Turnbuckles
Be Sure to Specify:**

- 1st — Diameter of thread.
- 2nd — Length of take-up.
- 3rd — Figure number which will designate the type of end fitting desired.

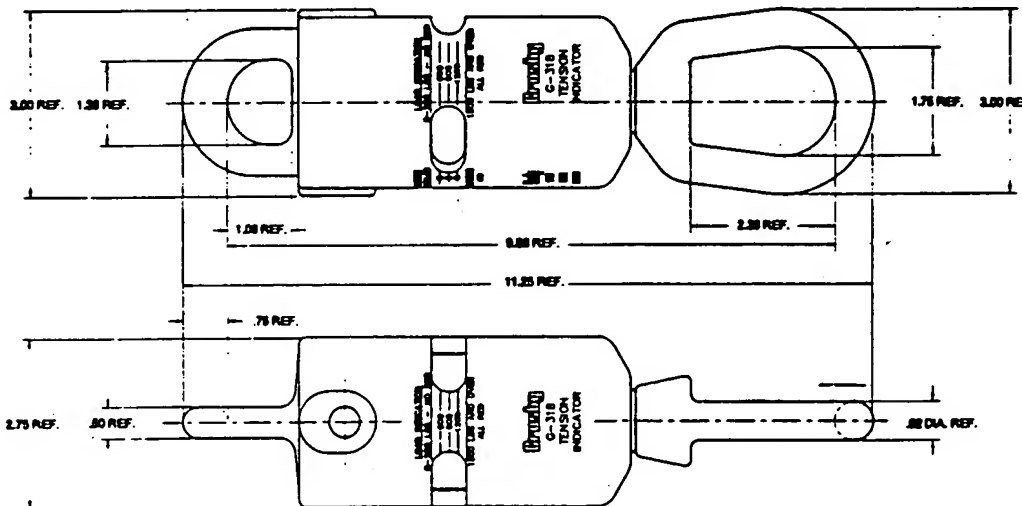

CROSBY G-318 TENSION INDICATOR

Monitors tensions from 200 to 1500 pounds.

- Accepts wide variety of fittings
- Attaches to either chain or wire rope
- Low maintenance
- Ultimate strength of 36000 pounds.
- Components plated for corrosion protection.
- Heat treated steel components for long life.
- Non swiveling design prevents unlaying of wire rope.



BEST AVAILABLE COPY